


| ITEM NO. | PART NUMBER | DESCRIPTION | QTY. |
|----------|---------------|--|------|
| 1 | K1672KT-04 | Leg Channel, Inner (Heavys) | 2 |
| 2 | K1691KT-20 | Channel for Sector Frame | 2 |
| 3 | Z2031KT-B | Angle, T-arm Stabilizer | 4 |
| 4 | Z2026KT-07 | Support Angle for Stabilizer Kits, 72" | 4 |
| 5 | K1325KT-01 | Stiff Arm Channel bracket | 8 |
| 6 | K2320KT18i | Threaded rod 3/4"x18", HDG, ASTM A193 B7 | 4 |
| 7 | H3012KT34GSA3 | Flat washer, 3/4", SAE (A325), HDG | 8 |
| 8 | H3002KT34G | Lock washer, 3/4", HDG | 8 |
| 9 | H2002KT34GA3 | Nut, 3/4" HH, HDG (A325) | 8 |
| 10 | H1029KT2GA3 | Bolt, 5/8"x2" (A325) HH, HDG | 8 |
| 11 | H3012KT58GSA3 | Flat washer, 5/8", SAE (A325), HDG | 8 |
| 12 | H3002KT58G | Lock washer, 5/8", HDG | 8 |
| 13 | H2002KT58GA3 | Nut, hex heavy 5/8" HDG A325 | 8 |
| 14 | H1026KT112GA3 | Bolt, 1/2"x1-1/2" (A325) HH HDG | 4 |
| 15 | K2120KT9i | Threaded rod 1/2" x 9", HDG | 8 |
| 16 | H3012KT12GSAE | Flat washer, hardened, 1/2", SAE, HDG | 20 |
| 17 | H3002KT12G | Lock washer, 1/2" HDG | 20 |
| 18 | H2002KT12GA3 | Nut, hex heavy 1/2" HDG A325 | 20 |

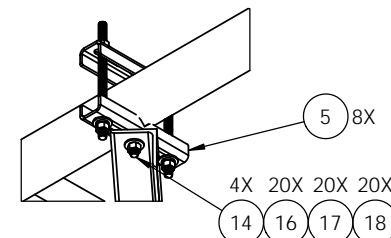

3431 Novis Pointe Acworth, Ga 30101
(770) 975-0500 office, (770) 974-5100 fax

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL: ± 1/32
ANGULAR: ± 2°
ONE PLACE DECIMAL: ± .06
TWO PLACE DECIMAL: ± .03
THREE PLACE DECIMAL: ± .010

INTERPRET GEOMETRIC TOLERANCING PER:

MATERIAL:

FINISH:

DO NOT SCALE DRAWING

| | |
|-----------|----------|
| NAME | DATE |
| KAR | 12/12/16 |
| CHECKED | |
| ENG APPR. | |
| MFG APPR. | |

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF KENWOOD TELECOM. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF KENWOOD TELECOM IS PROHIBITED.

KENWOOD TELECOM

TITLE: Sector Frame Reinforcement Kit Long

| | | |
|------|-----------|-----|
| SIZE | DWG. NO. | REV |
| | Z2026KTRL | C |

SCALE: 1:14 FINISHED WEIGHT: 224.70 SHEET 1 OF 1